


BIMETALNI TERMOMETAR, INOX KUĆIŠTE, ZA PODNO GRIJANJE

DN 40

BIMETALLIC THERMOMETERS, STAINLESS STEEL CASE, FOR UNDERFLOOR HEATING

DN 40

PST 40 VI P

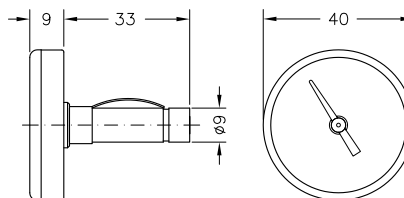

> PRIMJENA

Bimetalni termometar posebno dizajniran za mjerenje temperature u sustavima podnog grijanja.

> GRANE PRIMJENE

- sustavi podnog grijanja

> APPLICATIONS

Bimetallic thermometers specifically designed for to check the temperature in underfloor heating systems. They are retained in appropriate distribution ramps housings by a spring retaining clip. Two graduation available.

> MAIN FIELDS OF APPLICATION

- underfloor heating systems

> NORMATIVI

- UNI EN 13190
klasa preciznosti 2
- stupanj zaštite IP31 prema EN 60529

> NORMATIVE REFERENCES

- UNI EN 13190
class precision 2
- degree of protection IP31 according to EN 60529

> RADNA OPTEREĆENJA

- Dopuštena temperatura na kućištu termometra
- 20/+70°C

> OPERATING LIMITS

- Temperature allowed on the thermometer casing
- 20 ÷ +70 °C

> KONSTRUKCIJSKE KARAKTERISTIKE

- kućište od poliranog nehrđajućeg čelika AISI 304
- metakrilat prozor
- obojani aluminijski brojčanik
bijela pozadina, crni tisak
- mesing sonda Ø 9 mm
- mjerni mehanizam: precizna bimetalna spirala
- težina 29 grama

> CONSTRUCTION FEATURES

- case in polished stainless steel AISI 304
- highly transparent methacrylate window
- prepainted aluminium dial
white background, black graphics
- brass piping stem Ø 9 mm
- movement: precision bimetallic spiral
- spring retaining clip in nickel-plated steel
- weight 29 gr

> MODELI I CIJENE

PST 40 VI P		
ŠIFRA	M.P./SCALE	€
916 240 10	0/60 °C	3,90
916 240 20	0/80 °C	3,90

